

FOR A GUTTER LIKE THIS ONE TRY THE GREAT BARRIER LEAF



CLEAN GUTTER AND BIRDPROOFING SYSTEM

Installing Great Barrier Leaf

QUAD GUTTER

GBL is designed to fit the majority of roof gutters using the natural springing characteristics of high density polyethylene (HDPE) to push into the roll bead of the gutter and against the roof edge.

DETERMINING CORRECT WIDTH OF GBL

Insert a length of GBL back to front into the gutter arching it up against the roof edge. Mark the legs at the front of the roll bead for trimming.

CUTTING WIDTH

With a pair of scissors trim off legs to the required height.

FITTING AROUND INTERNAL BRACKETS

For gutters with internal brackets notch around the bracket.

INSTALLING IN GUTTER

Bend the fixing tabs over and they will spring back to approximately 90 degree angle keeping gloss side down. Insert legs into back edge of gutter. Starting at one end arch it over clipping tabs into roll bead. Trim next piece fitting the same way, overlapping each piece as you go. Always start at one end or corner.

EXTERNAL CORNER

After cutting to width, cut out left hand end approximately 10cm up to the slots. Fit into gutter making sure it is pushed into the roll bead. Cut out next piece on the opposite side, snip through the slots folding them into previous piece.




INTERNAL CORNER

Cut GBL to width & install one length to centre of the valley, trim off the corner. Fit the next piece to the centre of the valley overlapping the first piece. Put a snip in the and & fold into the slots.



SQUARE GUTTER

For square or fascia gutters cut four fixing tabs to sit on top of the roll bead, trim off at the edge. This will resist collapsing. Continue and fit same as quad gutter.

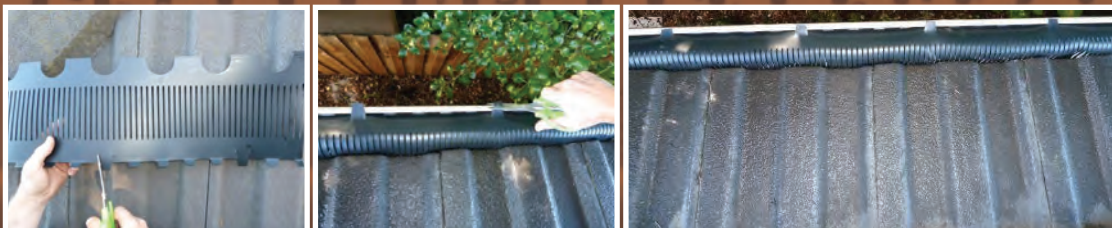

10 Year Guarantee!

For more information
visit www.greatbarrierleaf.com.au
or call us on 03 9722 2200



THE
GREAT
BARRIER
LEAF®

CLEAN GUTTER AND BIRDPROOFING SYSTEM